



HZBB

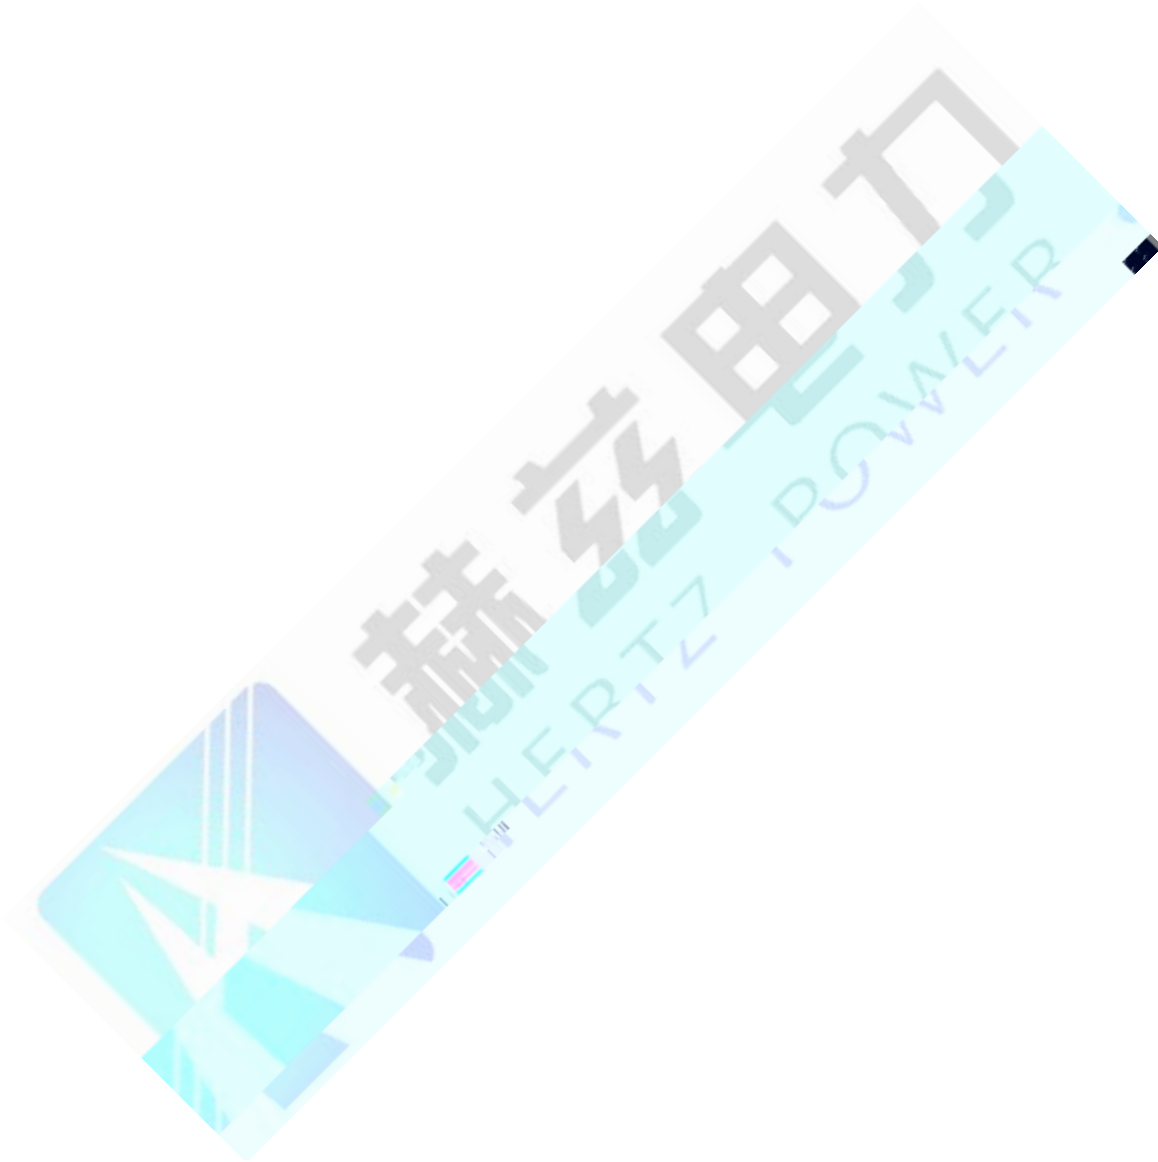

HZBB

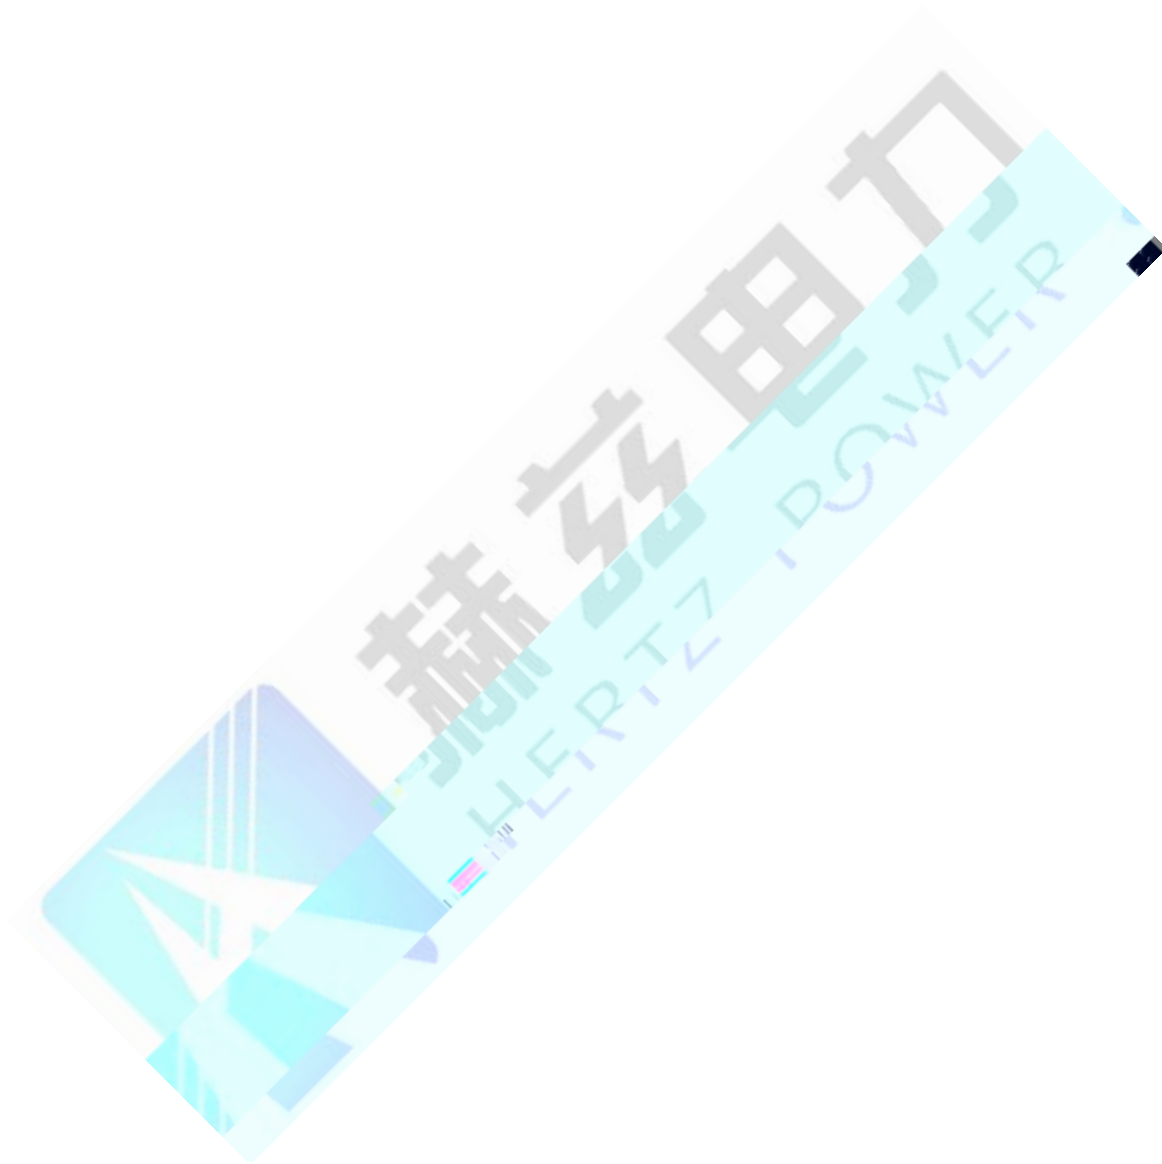

FA-8633

2.1

2.2 #B FQ ÈI È t PT Z

2.3

2.4 CT

52

2.5

2.6

197

2.7

10000

2.8

259

2.10

5

500

0


5T

Ð „ V



服务宗旨：快速响应，~~及时~~到满意，超过期望

- | | |
|-----|--|
| 3.4 | AC220V $\pm$ 10%, 50Hz |
| 3.5 | 3.5Kg |
| 3.6 | 260mm() $\times$ 200mm() $\times$ 160mm() |
| 3.7 | -10 50 |
| 3.8 | 90% |

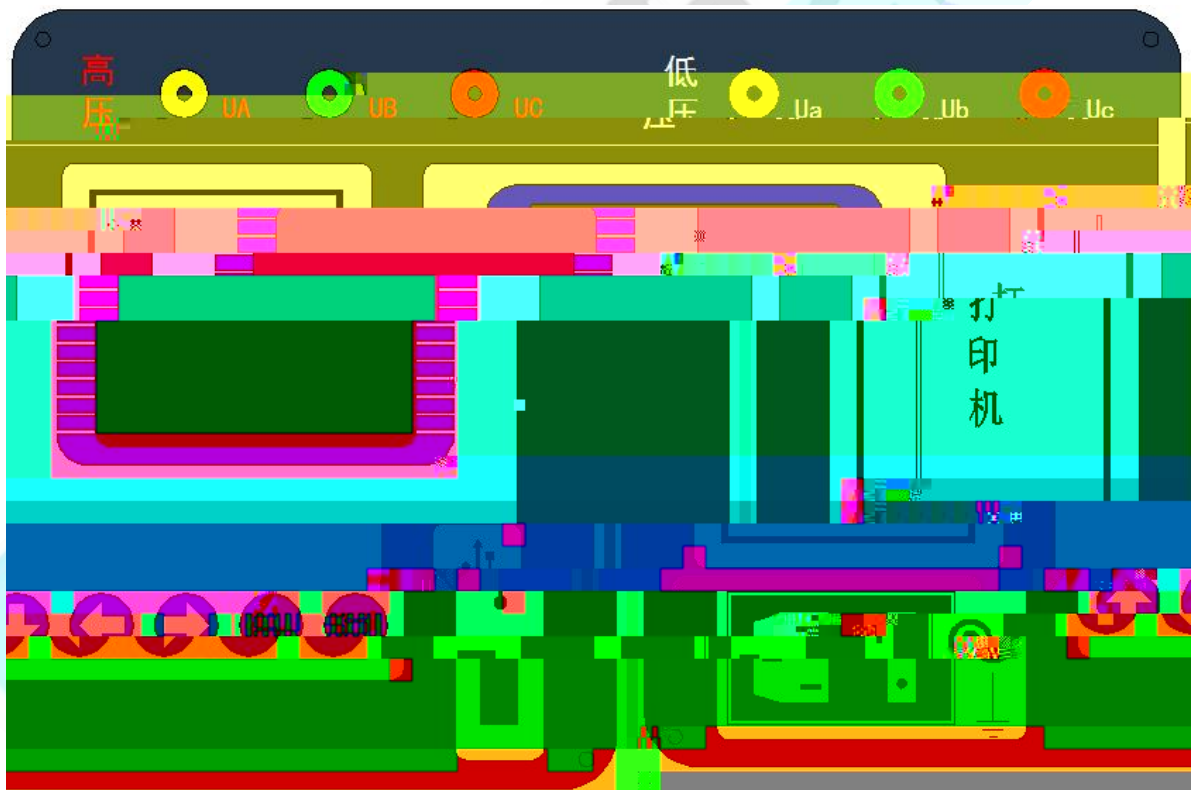

- Figure 4.1 illustrates a 3x3 grid structure. The top row is labeled 'A B C' and the bottom row is labeled 'a b c'. The middle row is labeled '3' in the center. The left column is labeled '4.1' and the right column is labeled '4.2'. The bottom row is labeled '4.3' and the bottom-right cell is labeled '4.4'.



4.5

FAT

T32

U

4.6

4.7

4.8

220V

250V/3A

φ 5mm × 20mm

5.1

5.1.1


PT

5.1.2

CT


5.1.3

5.2

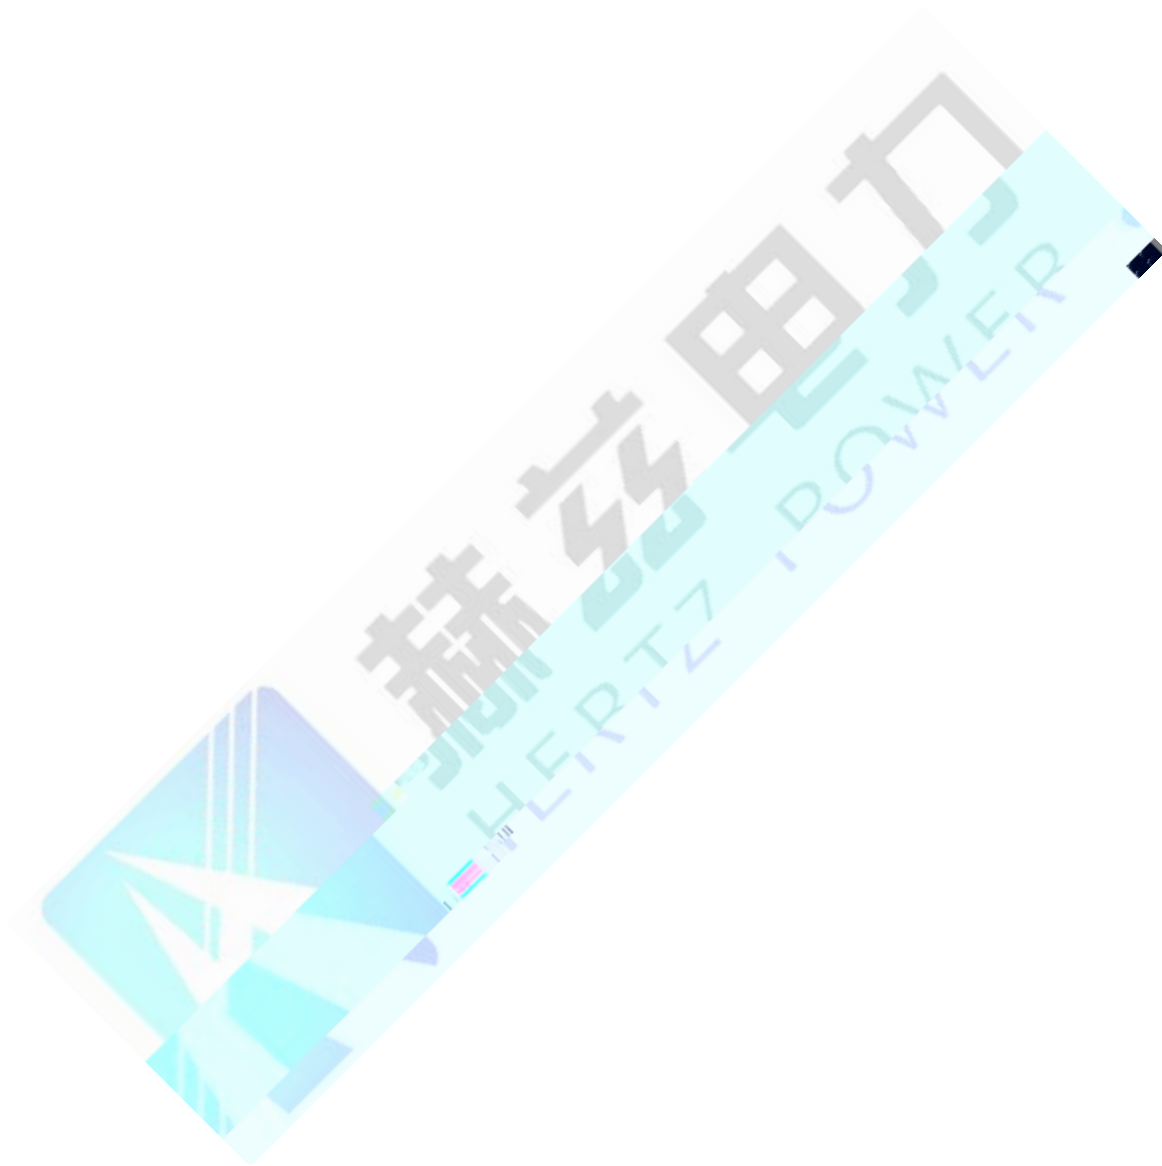

“ ” “ ”


“ ”

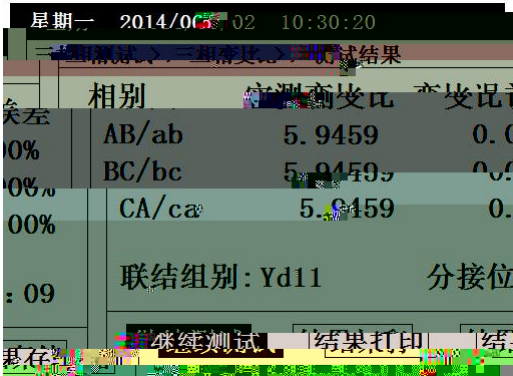

“ ” “ ” “ ” “ ” “ ” “ ”

5.3.1.2

“ ” “ ” “ ” “ ” “ ” “ ” “ ”

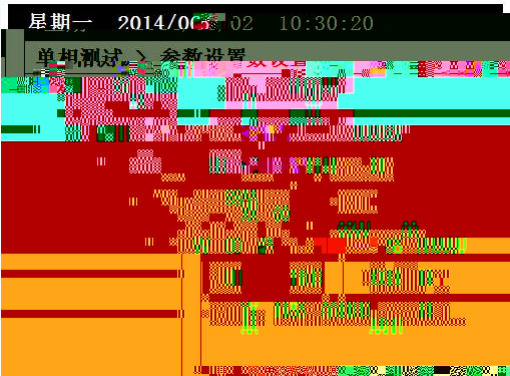

“ ”

“ CT ”



星期三 2014/06/02 10:30:20
 三相测试 > 三相变比 > 存储查询
 试品编号: 000000
 试验日期: 2014年06月02日 10时06分

相别	实测变比	变比误差
AB/ab	5.9459	0.00%
BC/bc	5.9459	0.00%
CA/ca	5.9459	0.00%
联络组别: Yd11	公称值: 00	

存储001/020

001/020 001
020

001

"

“

“

22

“

"

“

5.3.3

“

"

66


"

66

"

“

22

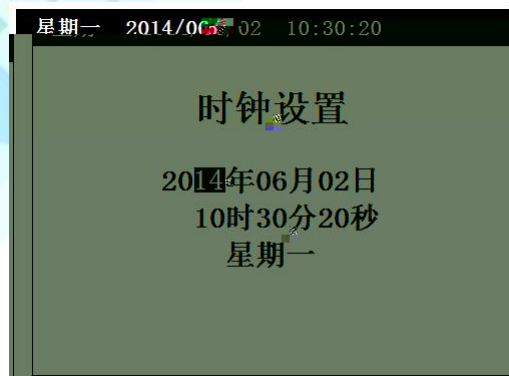

“

”

“

"

66

95

66

"

“

"

66

95

66

95

5.3.4

6.1

6.2 19 9 10 11

 9 12 2

6.3 1

6.4

“

”

“

”

1

2

1.

2.



1

2

3

2

24

027-83267669

24

48

4