


HZDR-SS






HZDR-SS

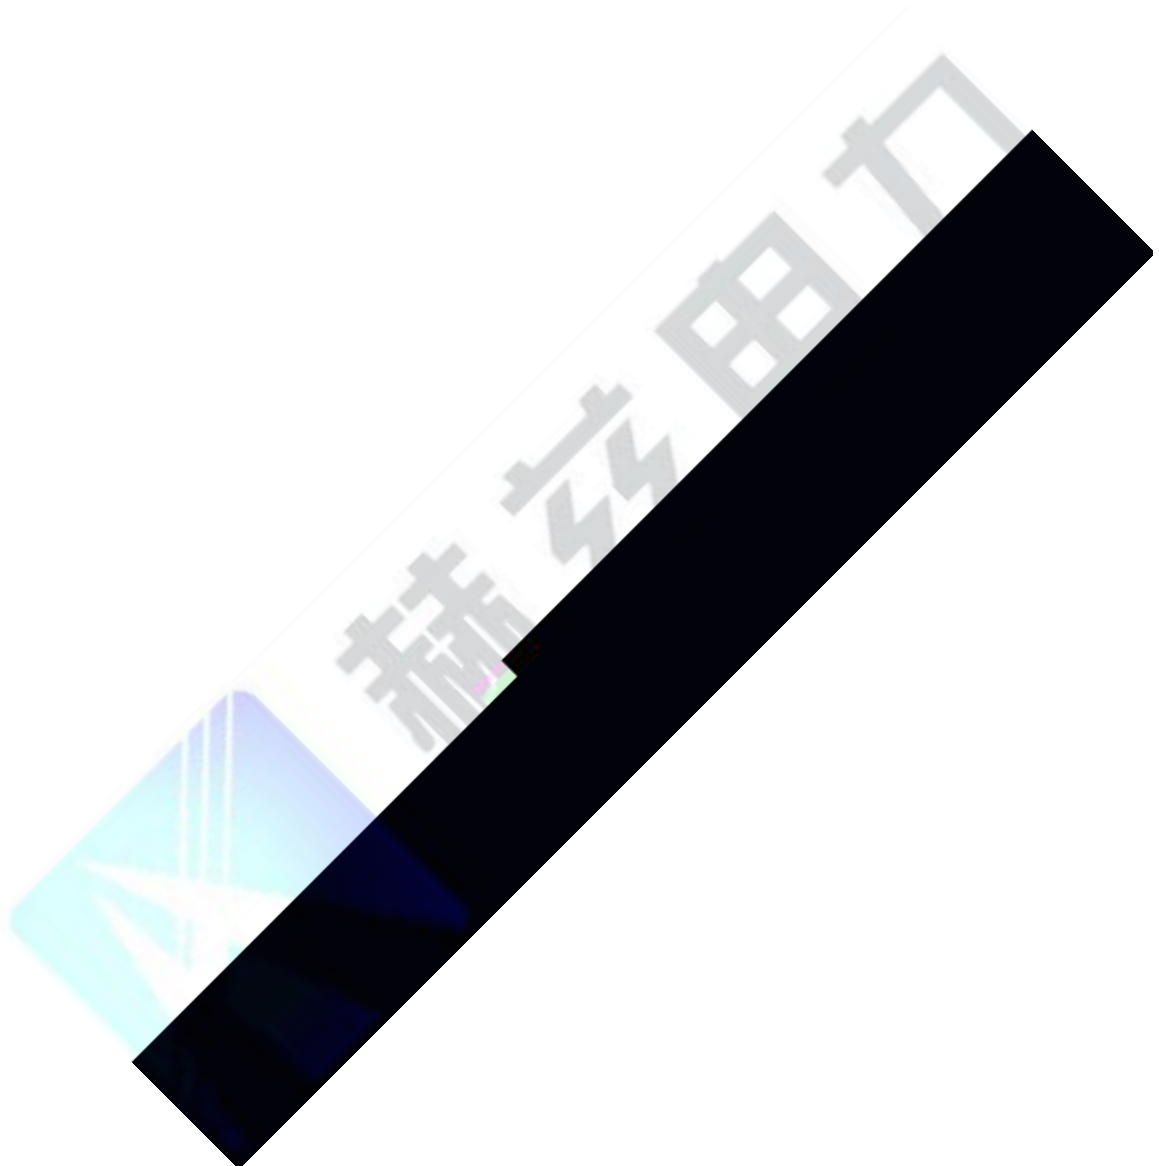

GB3983. 2- 1989
JB5346- 1998

DL/T840- 2003

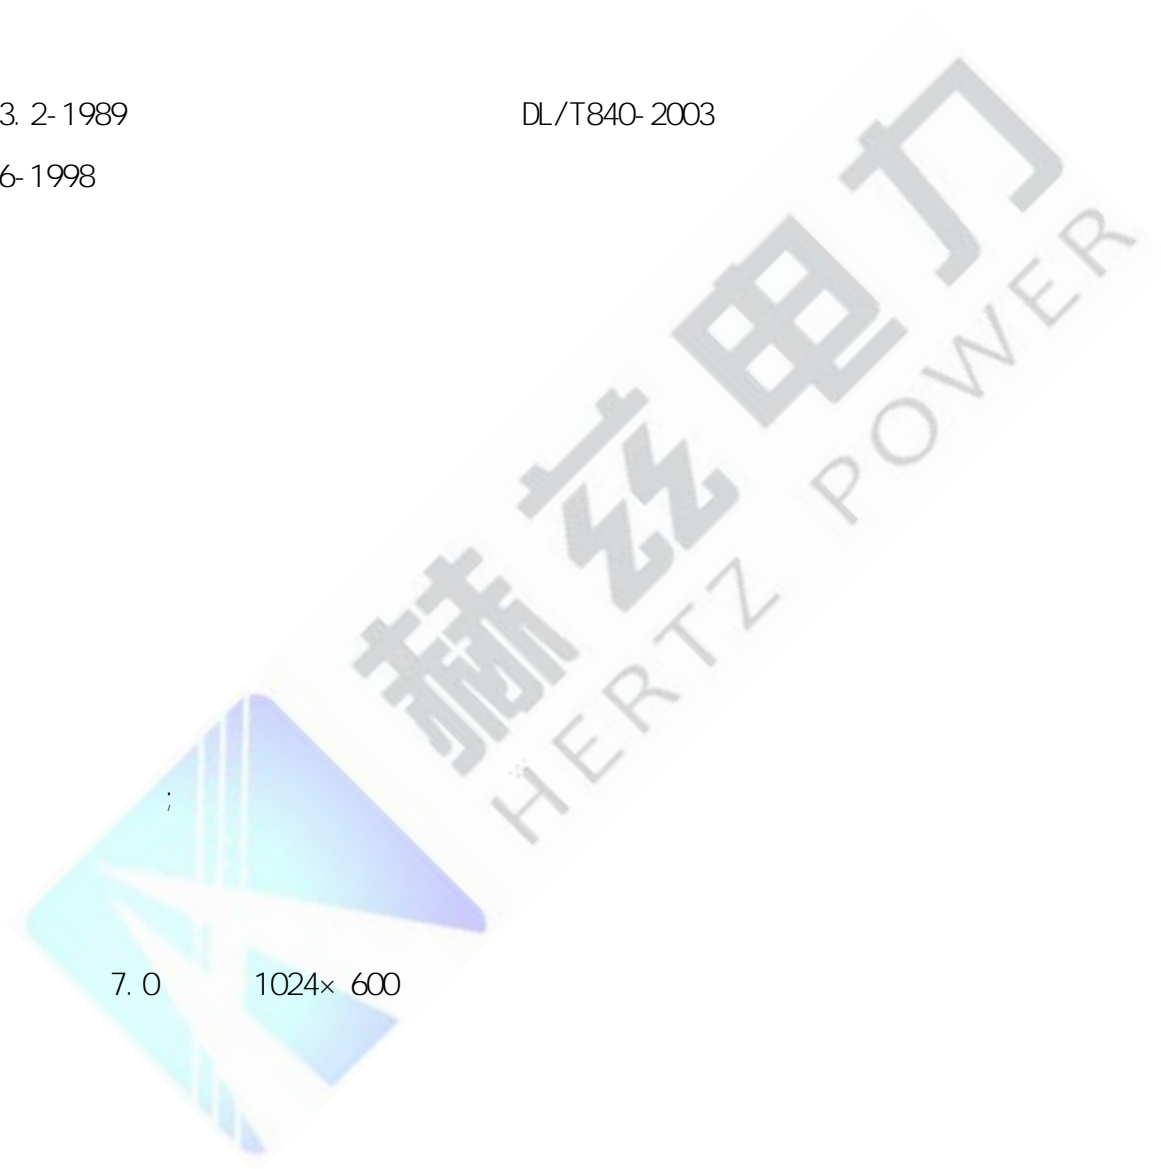

-
-
-
-
-
-
-
-
-
-
-

7.0 1024× 600

500

U

U




- 1 100V ± 10% 55Hz
- 40V± 10% 55Hz
- 8V± 10% 55Hz
- 2V± 10% 55Hz

- 2 :
- : 0. 1uF 6000uF ± 1%+0. 01uF
- : 50uH 20H ± (3%+0. 05uH)
- : 5mA 2A ± (3%+0. 05mA)
- : 20m 20k ± (3%+0. 1m)

- 3 5
- 4 425* 335* 210 mm
- 5 8KG

-20 40
85%RH

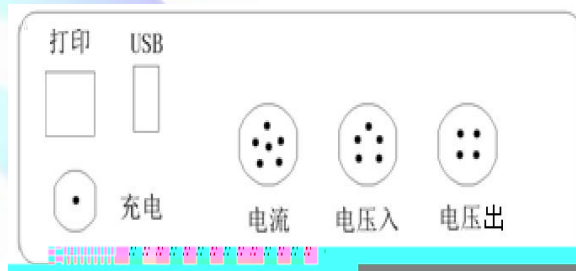



赫兹电力

产品宗旨：技术领先，质量可靠，轻便易用

服务宗旨：快速响应，客户到满意，超过期





三相电容测试 联结方式：D 型

| | | | | |
|------|---------|---------|---------|----|
| 电压 | 7.122V | 7.126V | 7.128V | 测试 |
| 电流 | 130.5mA | 130.9mA | 130.7mA | |
| 测试频率 | 55.00Hz | 55.00Hz | 55.00Hz | |

CT

2



CT

单相电容测试

| | | | | |
|------|---------|----|---------|----|
| 电压 | 4.160V | 阻抗 | 620.6mΩ | 测试 |
| 电流 | 114.9mA | 容抗 | 39.81Ω | |
| 测试频率 | 55.00Hz | 电容 | 79.95μF | |

225

027-83267669

" " " "

3

| | | | | |
|-----------|---------|----------------|-----------|------|
| 名称：测试1 | | 单相电容测试 外置电流钳 | | 上一条 |
| 额定频率：50Hz | | 额定电压：10.000 kV | | 下一条 |
| 电压 | 4.160V | 阻抗 | 620.6mΩ | U盘存储 |
| 电流 | 114.9mA | 容抗 | 39.81Ω | 打印 |
| 测试频率 | 55.00Hz | 电容 | 79.95uF | 返回 |
| 角度 | 269.0° | 容量 | 2.512MVar | |


" U " U

4

" "



" " " " " "

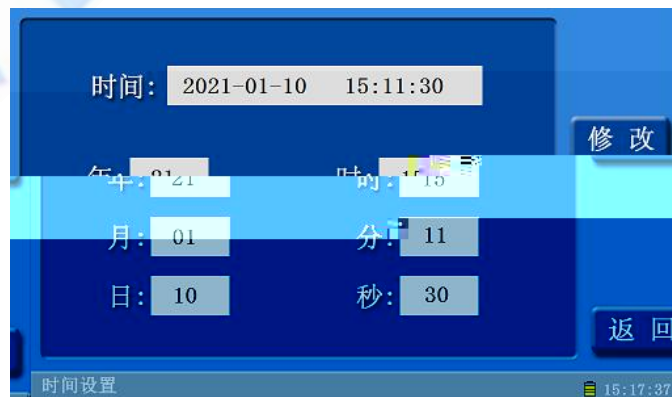


Y

Y

Yn

1

CT

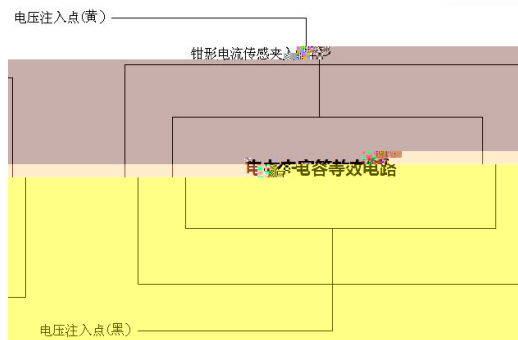


2

1 Y

CT

A, B, C

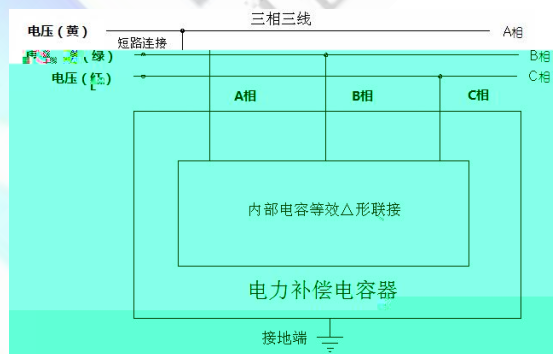

3

Yn

CT

A, B, C



产品宗旨：技术领先，质量可靠，轻便易用
服务宗旨：快速响应，客户满意，长期合作





- 8.1
- 8.2
- 8.3
- 8.4
- 8.5
- 8.5
- 8.6
- 8.7



1
2

1.



2

1

2

3



24

027-83267669

i

